



ANCHORS:

- **Anchors with tines**
- **Anchors without tines**
- **Steel Spikes and Picks**



REF : N10005 à N10010

SOGEPICK 'RAMSHORN' ANCHOR— BB HUB

Tubular anchor in galvanized steel:

Tube: Ø 21.3 mm

Tines: Ø 5 mm, Ramshorn tines deployed up to 25 cm

Lengths: 30 cm BB1, BB2 40 cm, 50 cm BB3, BB4 60 cm



REF : N10012 et N10013

SOGEPICK 'PIGTAIL' ANCHOR BBS

Tubular anchor in galvanized steel:

Tube: Ø 21.3 mm

Tines: Ø 5 mm, Pigtail tines deployed in circles

Lengths: 35 cm BBS, BBS 50 cm



REF : N10020 à N10024

SOGEPIK 'BULLHORN' ANCHOR BTF

Heavy tubular anchor with pinched tip in hot galvanized steel:

Ø 26.9 mm

Tines: Ø 6 mm, tines deployed as Bullhorn


Lengths: BTF 40 cm, 50 cm BTF, BTF 60 cm, 80 cm BTF, BTF 1m



REF : N10027 et N10028

SOGEPICK 'HARPOON' ANCHOR CS A


Tubular anchor with pointed tip of galvanized steel:
Ø 21.3 mm
2 fixed harpoon tines, 8 mm
Lengths: 40 cm CS1, CS2 50 cm

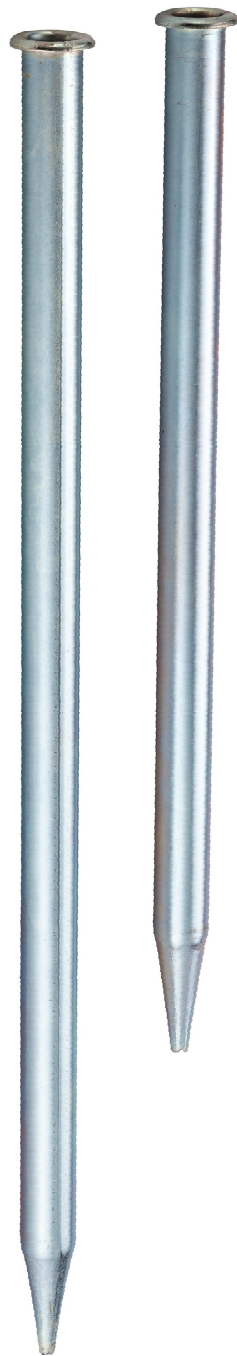

REF : N10025 et N10026

SOGEPIK 'BARE' ANCHOR CM (NO TINES)

Pointed tip anchor in galvanized steel :
Ø 21.3 mm
Lengths: 40 cm CM1, CM2 50 cm

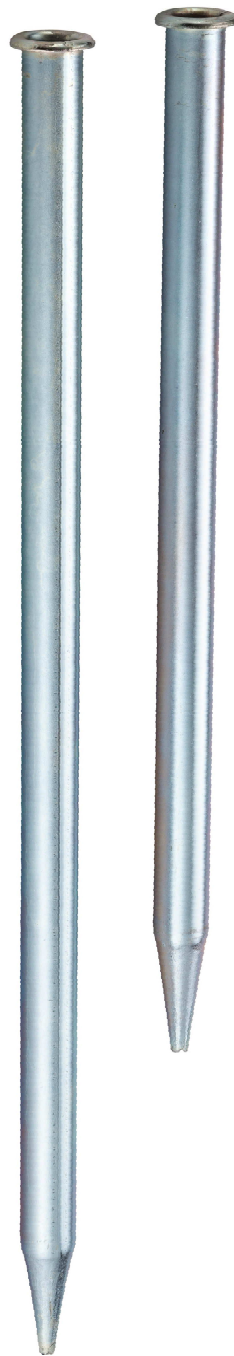

REF : N10018 et N10019

SOGEPIK 'BARE' ANCHOR BP2 (NO TINES)

Pointed tip anchor in galvanized steel tube :
Ø 26.9 mm
Lengths: 40 cm BP2, BP2 50 cm



REF : N10001 et N10004

**SOGEPICK 'HARDTAC' STEEL AN-
CHOR
Ø 20**

Deformed steel anchor with sleeve 62 mm,
electroplated zinc treated: Ø 20 mm

lengths:

Deformed Steel Ø 20 cm 40
Deformed Steel Ø 20 cm 50
Deformed Steel Ø 20 cm 60
Deformed Steel Ø 20 cm 80

REF : N10031 à N10033

**SOGEPICK 'BADTAC' ANCHOR OTP
Ø 16**

Deformed steel anchor with spiral ribs and
full sleeve 62 mm,
electroplated zinc treated: Ø 16 mm

lengths:

OTP1 30 cm
OTP2 40 cm
OTP3 50 cm



REF : N10036 et N10037

SOGEPICK 'TAC-TAC' ANCHOR OTP TIC Ø 16

Deformed steel anchor with welded sleeve, electroplated zinc treated:
Ø 16 mm
Length of the sleeve: 110 mm
Lengths: OTP TIC 30 cm, 40 cm OTP ICT